


SPECIFICATIONS

Focal Length	8 - 136 mm
Maximum Relative Aperture	1:1.6
Iris	F1.6 - Approx. 360
Zoom Ratio	17 X
Angular Field of View	43.6° x 33.4° at 8 mm 2.7° x 2.2° at 136 mm
Image Format	6.4 x 4.8mm (Ø8 mm)
Optical Back Focal Distance	19.33 mm (In Air)
Minimum Object Distance	1.8 m (From Front Vertex)
Flange Back	17.526 mm
Sensitivity Adjustment	0.5 - 1.0Vp-p (Image Signal)
Input Signal	Composite Video Signal or Video Signal
Photometry Range	Approx. 40% - 70% Variable to Vp-p

Input Impedance	High Impedance
Operation	Zoom Motorized (DC±6.4V, Max 40mA) Speed Approx. 4 sec.
	Focus Motorized (DC±6.4V, Max 40mA) Speed Approx. 4 sec.
	Iris EE (DC+8.5 to 16V : Fixed Voltage, Max 45mA)
EE Mechanism	The built-in EE Amp amplifies the difference between the video signal from the camera and the preset Iris signal level. It causes the Iris to change size.
EE Accuracy :	With Input Video Signal 0.7Vp-p
Operation Temperature	- 10 °C ~ 50 °C / 14 °F ~ 122 °F
Mount	C-Mount (Adjustable Lens Position)
Front Thread	58mm P0.75
Size, Weight	Ø64.2 x 72.5(W) x 79(H) x 130(D) mm, Approx. 650g

DIMENSIONS

UNIT: mm

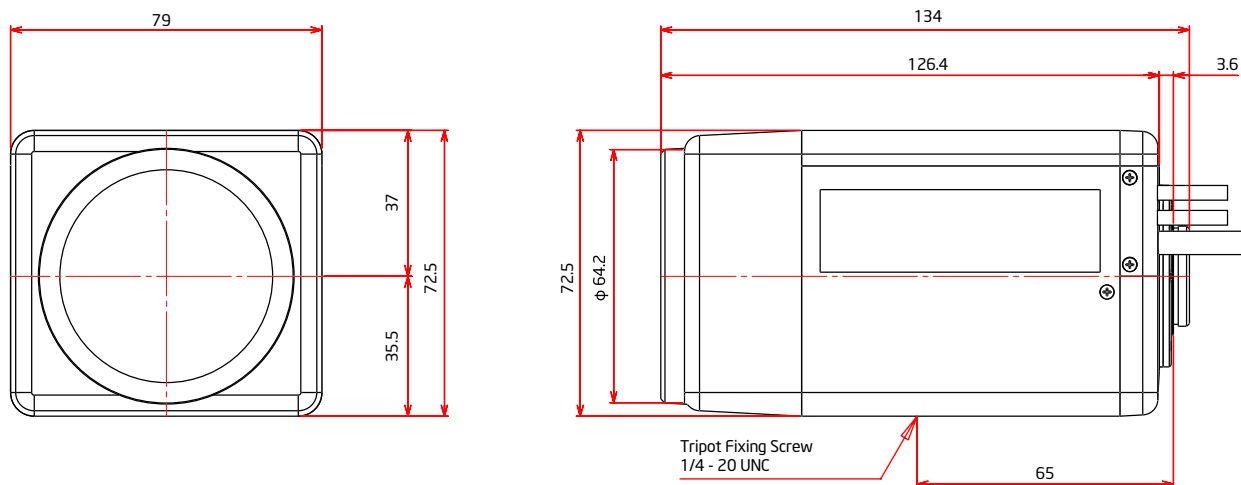

CIRCUIT DIAGRAM

