

## 1/2" Motorized Zoom with DC Auto-Iris 10-200mm F-1.9 C-Mount

Compatible with 1/2", 1/3" Cameras


### SPECIFICATIONS

|                                    |                                                 |
|------------------------------------|-------------------------------------------------|
| <b>Focal Length</b>                | 10 - 200 mm                                     |
| <b>Maximum Relative Aperture</b>   | 1:1.9                                           |
| <b>Iris</b>                        | F1.9 - Approx.360                               |
| <b>Zoom Ratio</b>                  | 20 X                                            |
| <b>Angular Field of View</b>       | 32.1° x 24.3° at 10 mm<br>1.9° x 1.4° at 200 mm |
| <b>Image Format</b>                | 6.4 x 4.8 mm (Ø8 mm)                            |
| <b>Minimum Object Distance</b>     | 1.5 m ( From Front Vertex )                     |
| <b>Optical Back Focal Distance</b> | 10.21 mm (In Air)                               |

|                              |                                           |
|------------------------------|-------------------------------------------|
| <b>Flange Back</b>           | 17.526 mm                                 |
| <b>Operation</b>             | <b>Zoom</b> Motorized (DC 8V, Max 30mA)   |
|                              | <b>Focus</b> Motorized (DC 8V, Max 30mA)  |
|                              | <b>Iris</b> IG (Auto Close System)        |
| <b>Operation Temperature</b> | - 10 °C ~ 50 °C / 14 °F ~ 122 °F          |
| <b>Mount</b>                 | C-Mount (Adjustable Lens Position)        |
| <b>Front Thread</b>          | 72 mm P0.75                               |
| <b>Size, Weight</b>          | 87(W) x 80(H) x 170.5(D) mm, Approx. 880g |

### DIMENSIONS

UNIT: mm

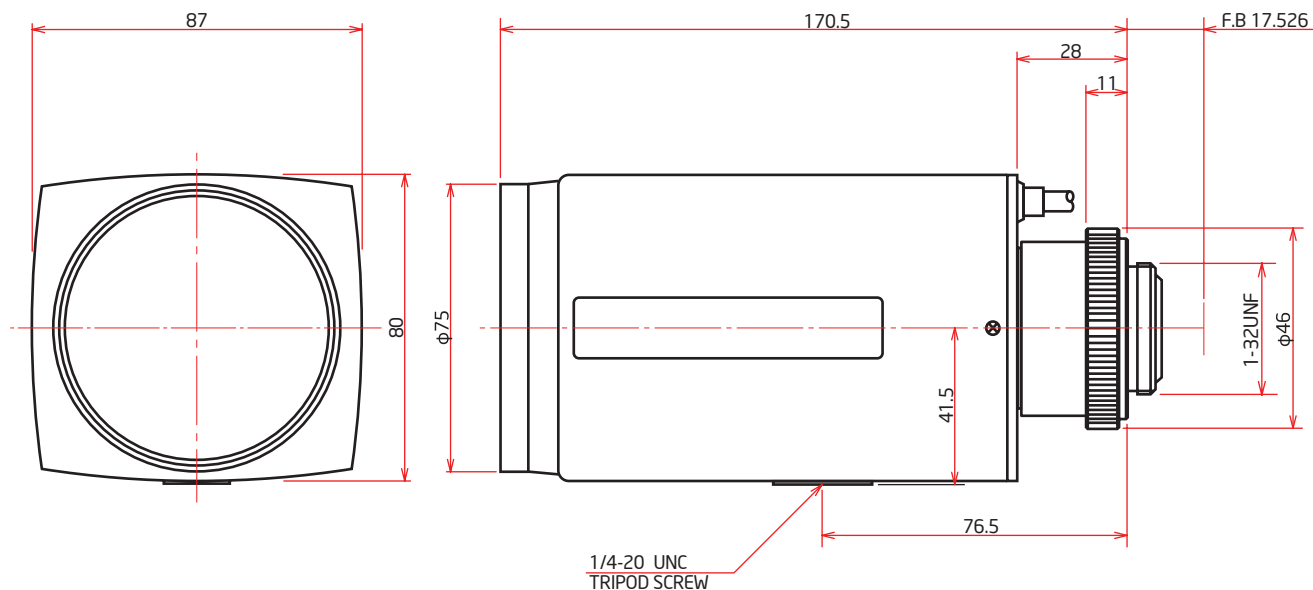

### CIRCUIT DIAGRAM

