

VZ-CF4.8AI

2/3" Fixed Focal Length Video Auto-IRIS 4.8mm F1.8 – C-Mount

Compatible with 2/3", 1/2", 1/3", 1/4" Cameras


SPECIFICATIONS

Focal Length	4.8mm
Maximum Relative Aperture	1:1.8
Iris	F1.8- Approx. 360 (With ND Spot Filter)
Sensitivity Adjustment	0.5 - 1Vp-p (Image Signal)
Angular Field of View	85.0 ° x 69.0°
Image Format	8.8 x 6.6 mm (Ø11 mm)
Minimum Object Distance	0.2 m (From Front Vertex)
Object Dimensions at M.O.D.	39.4 x 29.6 cm
Optical Back Focal Distance	10.86 mm (In Air)
Flange Back	17.526mm
Input Signal	Composite Video Signal or Video Signal


Photometry Range		Approx. 40% - 70% Variable to Vp-p
Input Impedance		High Impedance
Operation	Focus	Manual
	Iris	EE (DC+8 to 16V : Fixed Voltage, Max 40mA) Speed Within 4sec. (Auto Close System)
EE Mechanism		The built-in EE Amp amplifies the difference between the video signal from the camera and the preset Iris signal level. It causes the Iris to change size.
EE Accuracy :		With Input Video Signal 0.7Vp-p Within +/-10% of Mean Value
Operation Temperature		-10°C~50°C /14°F~122°F
Mount		C-Mount (Adjustable Lens Position)
Front Thread		43mm P0.75
Size		59.5(W) x 50(H) x 37.5(D) mm, Approx. 95g

DIMENSIONS

UNIT: mm

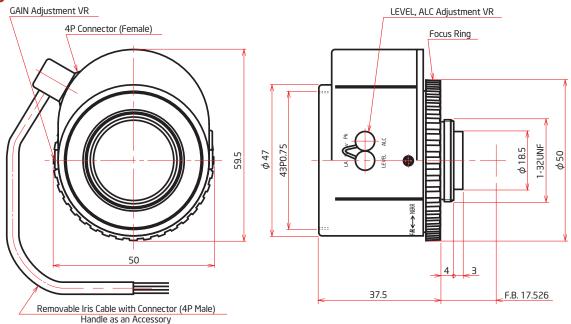

CIRCUIT DIAGRAM

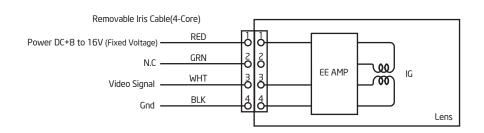

Sales: sales@viewzusa.com