


SPECIFICATIONS

Focal Length	8 ~ 80 mm	Flange Back	17.526 mm
Maximum Relative Aperture	1:1.2	Operation	Focus Motorized DC ± 6.4V, Max 40mA Speed Approx. 7s ec.
Iris	F1.2 - Close		Zoom Motorized DC ± 6.4V, Max 40mA Speed Approx. 6 sec.
Zoom Ratio	10 X		Iris Motorized DC ± 6.4V, Max 40mA Speed Approx. 3.5 sec.
Angular Field of View	43.6° x 33.4° at 8 mm 4.6° x 3.4° at 80 mm	Operation Temperature	- 10 °C ~ 50 °C / 14 °F ~ 122 °F
Image Format	6.4 x 4.8 mm (ø8 mm)	Mount	C-Mount (Adjustable Lens Position)
Minimum Object Distance	1.2 m (From Front Vertex)	Filter Size	62mm P0.75
Object Dimensions at M.O.D.	96.0 x 72.0cm at 8mm 9.6 x 7.1cm at 80mm	Size, Weight	80(W) x 70(H) x 126.6 mm, Approx. 700g
Optical Back Focal Distance	15.76 mm (In Air)		

UNIT: mm

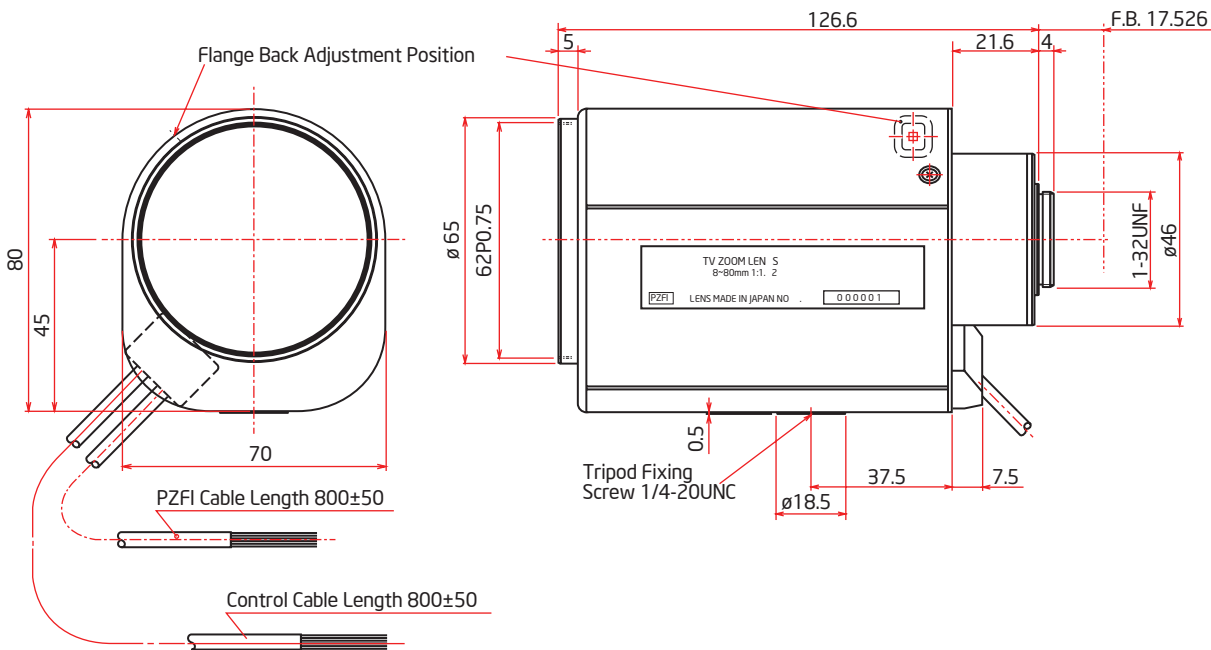

CIRCUIT DIAGRAM

