

1" Motorized Zoom with 3-Motor w/presets 16-160mm F-2.2 C-Mount


Compatible with 1", 2/3", 1/2", 1/3" Cameras

SPECIFICATIONS

Focal Length	16 - 160 mm	Flange Back	17.526 mm
Maximum Relative Aperture	1:2.2 (Tele End 1:2.7)	Operation	Zoom Motorized (DC +/- 6.4V, Max 80mA) Speed Approx. 5.5sec.
Iris	F2.2 - Close	Focus	Motorized (DC +/- 6.4V, Max 80mA) Speed Approx. 8sec.
Zoom Ratio	16 X	Iris	Motorized (DC +/- 6.4V, Max 70mA) Speed Approx. 3.5sec.
Angular Field of View	43.6° x 33.4° at 16 mm 4.6° x 3.4° at 160 mm	Operation Temperature	- 10 °C ~ 50 °C / 14 °F ~ 122 °F
Image Format	12.8 x 9.6 mm (Ø16 mm)	Mount	C-Mount (Adjustable Lens Position)
Minimum Object Distance	1.1 m (From Front Vertex)	Front Thread	77 mm P0.75
Object Dimensions at M.O.D.	88.0 x 66.0cm at 16mm 8.8 x 6.5cm at 160 mm	Size, Weight	117(W) x 100(H) x 176(D) mm, Approx. 1.4kg
Optical Back Focal Distance	18.6 mm (In Air)		

DIMENSIONS

UNIT: mm

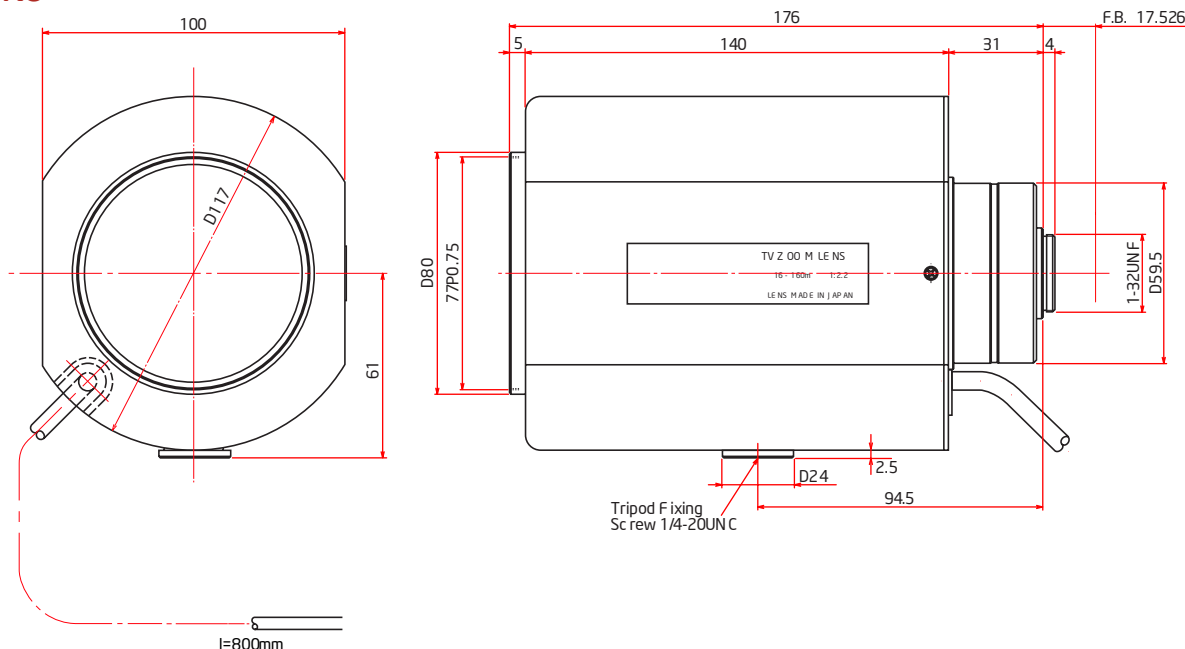

CIRCUIT DIAGRAM

